



Multi-Use Backpack Sprayer

20V^{MAX}
LITHIUM ION

LITHIUM-ION BATTERY

Let the Sprayer Work for You!

21 in. Non-corrosive Poly Wand -
Designed for chemical resistance.

Viton® Seals - Resistant to harsh chemicals preventing wear and potential leaking.

20V Rechargeable Lithium-ion Battery -
Sprays up to 50 gallons of liquid per charge.

Professional Shut-off with Comfort Grip, Lock & Filter - Can be operated with heavy-duty work gloves.

Carry Handle with Storage Clips - For easy transportation and wand placement.

Heavy-duty Reinforced Hose - Reduces kinking and offers a longer service life.

Leak Prevention Cap and Check Valve -
Designed to prevent leaks through the cap.

50 Gal. PER CHARGE
SPRAYS UP TO 4 hrs. PER CHARGE

VITON SEALS
RESISTANT TO HARSH CHEMICALS PREVENTING WEAR and POTENTIAL LEAKING.

SPRAYS UP TO 24'
For TARGETED APPLICATIONS FROM A DISTANCE



4
Gal. | 15 L
Capacity

Durable diaphragm pump

UP TO 4 HOURS
Spray time

2 YEAR LIMITED WARRANTY | **30 DAY MONEY-BACK GUARANTEE**

4 Gal.

*Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

©Copyright 2021. The Fountainhead Group, Inc. All rights reserved.

BXSP190657

4 Gal.

LITHIUM-ION BATTERY POWERED

Multi-Use Backpack Sprayer



Specifications

SKU	BXSP190657
Tank Capacity	4 Gallons
Extension	21 in. Poly
Hose Length	50 in. Nylon Reinforced
UPC	8 41688 00638 6
Pallet Quantity	24

Performance

Flow Rate	0.3 GPM at 40 PSI
Spray Distance	Up to 24 Feet
Spray Duration Per Charge	Up to 4 Hours
Spray Volume Per Charge	50 Gallons


Replacement Parts

20V 2.0 Ah Li-ion B+D Battery Pack	No. 184670
20V 2.1 Ah Li-ion B+D Battery Charger	No. 184671
Sanitizing Optimizer Kit	No. 184828

Warranty

2 Year

4 Spraying Nozzles

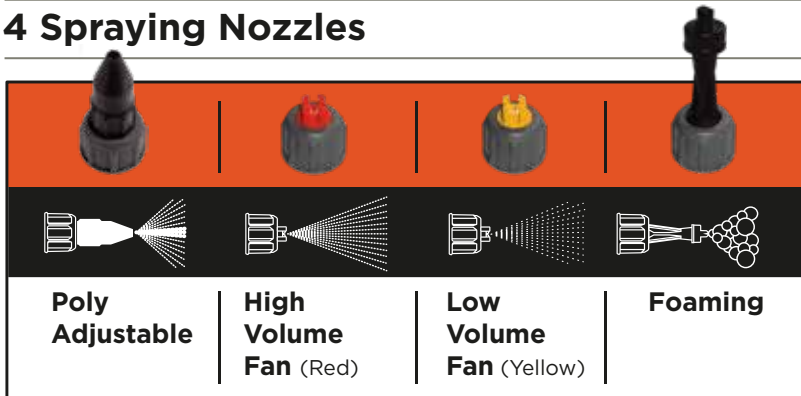

20V LITHIUM ION

POWER CONNECT

BATTERY SYSTEM

Interchangeable Battery

works with

POWER TOOLS | LAWN + GARDEN | HOME CLEANING

BLACK+DECKER Logo are registered trademarks of The Black & Decker Corporation and are used under license. Manufactured under license by The Fountainhead Group, Inc.



Also Accepts TeeJet® Nozzles

*Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

BXSP190657